

AN-130 POWERED MONITORS

The AN-130 is the perfect choice for classrooms, small conference rooms and corporate road warriors who rely on their sound systems to command the audience. Plus, it's the perfect companion for a video projector, VCR or laptop computer. Weighing in at just 8.5 pounds this powerful sound system is designed for audiences up to 100 people.



SPECIFICATIONS

AN-130

Rated power:	30 watts continuous
Max SPL@Rated Power	101 dB @ 1 meter
Frequency Response	65 Hz - 18 KHz \pm 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110-125 VAC, 50/60 Hz
Export Model	208 - 240 VAC, 50/60 Hz (50W max)
Fuse Rating	T 1.0A / 250V
Export Rating	T 0.5A / 250V (internally mounted)

Inputs

Line (2) Hi-Z, unbalanced, RCA unbalanced (summing L + R)

Microphone Lo-Z, unbalanced, 1/4" phone

Output

Line Lo-Z, buffered, 1/4" phone

Sensitivity for Rated Output

Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	8.5 lbs, 3.8 Kg



FOR MORE INFORMATION PLEASE CALL:

800.262.4671
www.anchoraudio.com

MADE IN THE USA!

Now featuring 16 channel UHF diversity wireless by Anchor Audio

Reach crowds of 100+

Delivers up to 101 dB of clear sound

Optional remote control - Volume/Mute Controls

Bass and Treble controls

30 watt amplifier provides lots of sound

Magnetically shielded speaker for AV use

Has RCA Line In, 1/4" Line In and 1/4" Mic In

1/4" Line Out Jack - Daisy chain multiple systems or record out

Durable injection-molded polypropylene case

Weighs just 8.5 pounds

Carbon Fiber Cone

6-YEAR WARRANTY!

AN-130 PACKAGE INCLUDES:

- AN-130U1 w/built-in wireless receiver and remote control
- WB-6000 Body Pack and choice of mic:
 - LM-60 Lapel Mic, HBM-60 Headband Mic, CM-60 Collar Mic or EM-60T UltraLite Mic



AN-130 Speaker Monitor

Portable Speaker Monitor Specifications

Advancing Technology

The Anchor Audio AN-130 speaker monitor is a light-weight, easy to use system that fills the room with your voice, with the wireless microphone you're free to move around the room. The AN-130 is ideal for use with a video projector, PC or CD/DVD player. Who uses the AN-130? Teachers, corporate presenters, anyone that needs to reach groups of one to one hundred.



AN-130 MODELS

- AN-130** Speaker monitor / white
- AN-130BK** Speaker monitor / black
- AN-130U1** 1 built-in wireless receiver / white
- AN-130U1BK** 1 built-in wireless receiver / black
- AN-130RC** Remote control / white
- AN-130RCBK** Remote control / black

6-YEAR WARRANTY!

- REACH CROWDS OF 100+
- 101 DB OF CLEAR SOUND
- 16 CHANNEL UHF DIVERSITY WIRELESS BY ANCHOR AUDIO
- BASS & TREBLE CONTROLS
- 30 WATT AMPLIFIER EQUALS LOTS OF SOUND
- MAGNETICALLY SHIELDED FOR AV USE
- 4.5" CARBON FIBER WOOFER DOME TWEETER
- INPUT JACKS: RCA LINE-IN, 1/4" LINE-IN & 1/4" MIC-IN
- 1/4" LINE-OUT JACK - DAISY CHAIN MULTIPLE SYSTEMS OR RECORD OUTPUT
- REMOTE CONTROL FOR VOLUME & MUTE
- DURABLE INJECTION-MOLDED POLYPROPYLENE CASE
- WEIGHS JUST 8.5 POUNDS

MADE IN THE USA!


AN-130 ACCESSORIES

- REMOTE-130** Infrared remote control
- MIC-90P** Professional dynamic, cardioid pattern handheld microphone
- CC-100** Speaker/accessory bag
- CC-100XL** Speaker/accessory bag - large
- HC-1550** Custom traveling hard case
- SS-250** Speaker stand
- MSB-201** Mic stand w/ boom
- SB-1** Stand mount*
- SB-3** Ceiling mount bracket*
- SB-360** 360° swivel wall bracket*

* Available w/ black or white finish

UHF WIRELESS:

- WH-6000** Wireless Handheld Microphone/Transmitter
- WB-6000** Wireless Body-Pack Transmitter w/o Microphone. Mic Options Include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

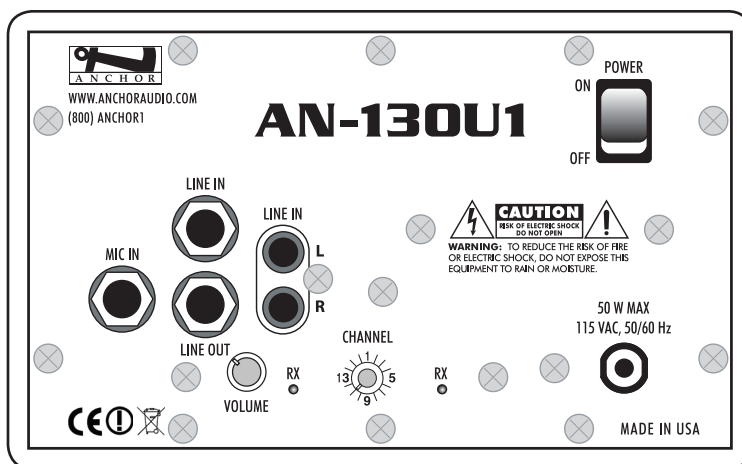

AN-130 TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts	Inputs	
Max SPL @ Rated Power	101 dB @ 1 meter	Line (2)	Hi-Z, unbalanced, RCA (summing L+R)
Frequency Response	65 Hz – 18 kHz ± 3 dB	Microphone	Lo-Z, unbalanced, 1/4" phone
Speaker Type	4.5" woofer, 10 mm dome tweeter	Output	
AC Power Reqs.	110 - 125 VAC, 50/60 Hz	Line	Lo-Z, buffered, 1/4" phone
Export Model	208 - 240 VAC, 50/60 Hz (50W max)	Sensitivity For Rated Output	
Fuse Rating	T 1.0A / 250V	Line	-20 dBV (100 mVrms)
Export Model	T 0.5A / 250V (internally mounted)	Microphone	-43 dBV (7.5 mVrms)
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm		
Weight	8.5 lbs / 3.8 Kg		



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com