



# SEVILLE

POWERED LECTERN

The Seville adds power, impact and authority to a presentation. And that's before you even turn it on.



- ▼ Powerful, 70-watt sound system can handle crowds of 750 or more.
- ▼ Sensitive electret microphone picks up the most soft-spoken presenters.
- ▼ Shock-absorbing mic mount lets you boost the volume without adding feedback or vibration noise.
- ▼ Optional built-in wireless microphone system.
- ▼ Top section, including sound system, lifts off for use as a tabletop lectern (deluxe model).
- ▼ 6 year warranty.




# Seville Lectern System

Portable Lectern Sound System Specifications

## Advancing Technology

The Seville lectern brings an air of strength and integrity to any presentation. With its built-in sound system and rich oak finish, the Seville is at home on stage, in an elegant hotel or in the university auditorium. The wireless model allows the presenter to use a projector or white board with a hands free microphone.

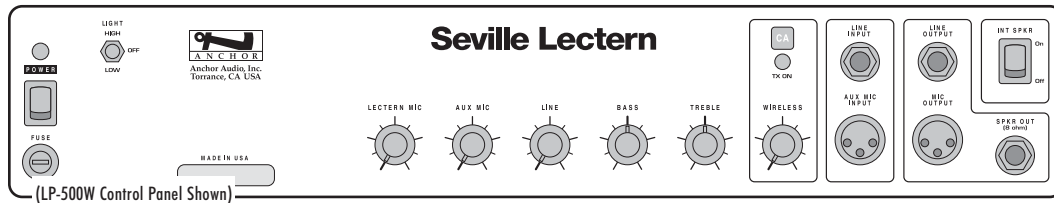

### SEVILLE PRO MODELS

**LP-500** Lectern w/ sound system

**LP-500W** Lectern w/ sound system and wireless UHF receiver

### UHF WIRELESS

**WH-6000** Wireless Handheld microphone/transmitter

**WB-6000** Wireless body-pack transmitter w/ Microphone. Mic options include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

### SEVILLE ACCESSORIES

**LM-618** 24" gooseneck microphone

**LC-650** Padded nylon slipcover

**UHF-6400** 64 channel UHF wireless receiver/transmitter set w/ choice of microphone. Wireless Handheld mic/transmitter (WH-6400) or Wireless body-pack transmitter (WB-6400) w/ Microphone.

Mic options include: Over-the-Ear/EM-60, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

### SEVILLE LECTERN SYSTEM TECHNICAL SPECIFICATIONS

Rated Power Output	70 watts continuous
Max SPL @ Rated Power	107 dB @ 1 meter
Frequency Response	65 Hz - 15 KHz
Speaker Type	6.5-inch woofer, high-output tweeter
Dimensions (HWD)	49 x 24 x 21" / 125 x 61 x 53 cm
Weight	122 pounds / 55 Kg
<b>Inputs:</b>	
Lectern Mic	Lo-Z, balanced, phantom power, XLR
Auxiliary Mic	Lo-Z, balanced, phantom power, XLR
Line	Hi-Z, unbalanced, 1/4"-phone

<b>Sensitivity For Rated Output:</b>	
Microphone	-52 dBV (2.5 mVrms)
Line	-14 dBV (200 mVrms)
<b>Outputs:</b>	
Mic (post fader)	Lo-Z, transformer balanced, XLR
Line (post fader)	buffer isolated, 1/4" phone
Speaker output:	70 watts @ 4ohm, switched, 1/4" phone
AC Power Req.	110 - 125 Volts AC, 50/60 Hz 210 - 240 Volts AC, 50/60 Hz (40 VA nominal, 120 VA max)

(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



**Anchor Audio, Inc.**  
Portable Sound Systems • Torrance, California

**800-262-4671**  
www.anchoraudio.com