



ClassACT

CONTROLLED WIRELESS RANGE

The ClassACT (CA-130U1) is a light-weight, easy to use sound system that fills the classroom with your voice using a wireless microphone. With a hands free microphone you can make a presentation, write on a whiteboard or operate your projector without interrupting your presentation. Teachers, corporate presenters and training instructors can all use a ClassACT.



SPECIFICATIONS

ClassACT

Rated power:	30 watts continuous
Max SPL@Rated Power	101 dB @ 1 meter
Wireless Antenna Range	30 feet / 9.14 meter
Frequency Response	65 Hz - 18 KHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110-125 VAC, 50/60 Hz
Export Model	208 - 240 VAC, 50/60 Hz (50W max)
Fuse Rating	T 1.0A / 250V
Export Rating	T 0.5A / 250V (internally mounted)

Inputs

Line (2)	Hi-Z, unbalanced, RCA unbalanced (summing L + R)
----------	--

Microphone	Lo-Z, unbalanced, 1/4" phone
------------	------------------------------

Output

Line	Lo-Z, buffered, 1/4" phone
------	----------------------------

Sensitivity for Rated Output

Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	8.5 lbs, 3.8 Kg

MADE IN THE USA!

Reach crowds of 100+
Delivers up to 101 dB of clear sound
Anchor wireless receiver & Mic w/16 user-selectable channels
Even sound distribution insures everyone can hear you
Remote control for Volume and Mute
Controlled wireless antenna range - Keeps the audio in the room
Magnetically shielded speaker for AV use
Unit can be mounted on a wall, ceiling or speaker stand
"Daisy Chain" second speaker for larger rooms
Durable injection-molded polypropylene case
Weights just 8.5 pounds
Carbon Fiber Cone

6-YEAR WARRANTY!

ClassACT BASIC PACKAGE INCLUDES:

- CA-130U1 w/built-in wireless receiver and remote control
- WB-6000 Handheld mic or
- WB-6000 Body Pack and choice of mic:
 - LM-60 Lapel Mic, HBM-60 Headband Mic, CM-60 Collar Mic or EM-60T UltraLite Mic



FOR MORE INFORMATION PLEASE CALL:

800.262.4671

www.anchoraudio.com

ClassACT Powered Monitor


Portable Speaker Monitor Specifications

6-YEAR WARRANTY!

REACH CROWDS OF 100+

Advancing Technology

The ClassACT (CA-12001) is a light-weight, easy to use sound system that fills the classroom with your voice using a wireless microphone. With a hands-free microphone you can make a presentation, write on a whiteboard or operate your projector without interrupting your presentation. Teachers, corporate presenters and training instructors can all use a ClassACT.

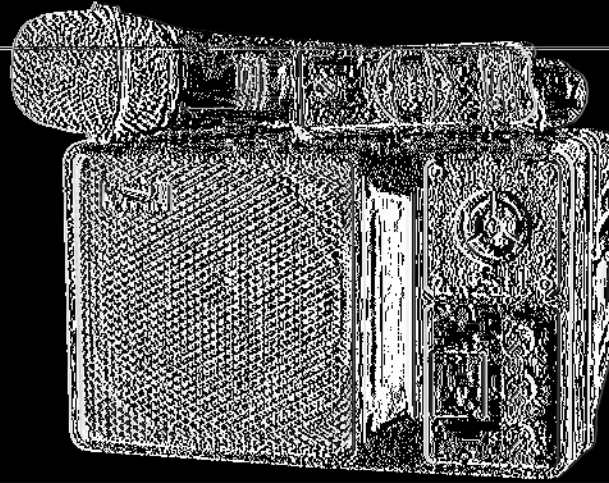

100 DB OF CLEAR SOUND FROM 30 FEET AWAY

ANCHOR WIRELESS RECEIVER & MICROPHONE BY 16 USER SELECTABLE CHANNELS

EVEN SOUND DISTRIBUTION INSURES EVERYONE IN ATTENDANCE CAN HEAR YOU

ADDITIONALLY SHIELDED SPEAKER FOR NOISE

"DUSTY-CRANE" SECOND SPEAKER FOR LARGER

ROOMS - CONTROLLED VOLUME - 2 WATT

CONTROLLED WIRELESS ANTENNA RANGE IS THE AUDIO IN THE ROOM

UNIT CAN BE MOUNTED ON A WALL, CEILING SPEAKER STAND

DURABLE INJECTION-MOLDED POLYPROPYLENE

LIGHTWEIGHT WEIGHS JUST 0.5 POUNDS

ANALOGY: WHY BUY US?

SAVING YOUR VOICE... GAINING YOUR AUDIENCE... AND ENHANCING YOUR PRESENTATION WITH A CLASSACT


CLASSACT ACCESSORIES

- IRB0016-130 Infrared remote control
- MHC-900P Professional dynamic, corded pattern handheld microphones
- CC-100 Speaker/accessory bag
- CC-1000L Speaker/accessory bag - large
- MHC-1550 Custom traveling hard case
- SS-250 Speaker stand
- MSSR-2001 Mic stand w/ boom
- SM-1 Stand mount*
- SM-3 Ceiling mount bracket*
- SM-360 360° swivel wall bracket*

- * Available w/ black or white finish

WIRELESS:

- WHH-4000 Wireless Handheld Microphone/Transmitter
- WHB-4000 Wireless Body-Pack Transmitter w/o Microphone. Mic Options include: Over-the-Ear/OTB-60, Lapel/LB-60, Collar/CA-60, Headband/HB20-60

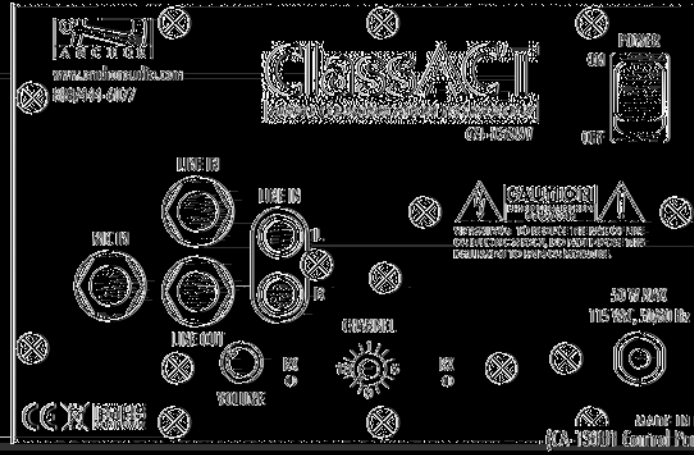

CLASSACT MECHANICAL SPECIFICATIONS

Rated Power Output	30 watts	Input	
Max SPL @ Rated Power	100 dB @ 1 meter	Line (2)	Hi-Z, unbalanced, RCA (ground)
Wireless Antenna Range	30 feet / 9.14 meter	Microphone	Lo-Z, unbalanced, 1/4" phone
Frequency Response	65 Hz - 18 kHz ± 3 dB	Output	
Speaker Type	4.5" woofer, 10 mm dome tweeter	Line	Lo-Z, balanced, 1/4" phone
AC Power Req.	110 - 125 VAC, 50/60 Hz	Sensitivity For Rated Output	
Export Model	200 - 240 VAC, 50/60 Hz-50W max	Line	-20 dBV (100 mVrms)
Fuse Rating	T 1.0A / 250V	Microphone	-48 dBV (2.5 mVrms)
Export Model	T 0.5A / 250V (internally mounted)		
Dimensions (H/W/D)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm		
Weight	0.5 lbs / 0.0 kg		

FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Anchor Audio, Inc.
Portable Sound Systems • Torrance, California

(800) 421-4141 • (310) 209-4141
www.anchoraudio.com

AMPLIFIER
MAGNETIC
CODE
USE
BOOKS
REPS
FOR
CASE
S
FA
al Show)
L-1-B)
UT NOTICE)
www.anchoraudio.com
S-12030V