

## BEACON FEATURES

### 6-YEAR WARRANTY!

REACH CROWDS OF 5,000+

AC MODE = 300W / DC MODE = 60W

EIGHT 4" SPEAKERS / TWO 8" WOOFERS

TRUE AC/DC - 110/220V POWER SUPPLY

TWO UNIVERSAL MIC INPUT JACKS

SINGLE OR DUAL BUILT-IN UHF WIRELESS  
W/ 16 USER SELECTABLE CHANNELS

EXTERNAL CD PLAYER

"VOICE OVER" MUSIC DUCKING FEATURE

PATENTED, LIGHTWEIGHT SPEAKER ARRAY  
W/ SNAP LOCK CONNECTION

DURABLE CASE W/ WHEELS, RETRACTABLE  
HANDLE & NYLON STORAGE BAG

PROPRIETARY CLASS D AMPLIFIER

NO TRIPOD STAND NEEDED


### MADE IN THE USA!

# Beacon™ Sound System

## Portable Line Array Sound System Specifications

### Advancing Technology

The Beacon's patent pending line array tower can be opened in less than a minute. Wireless microphones? CD player? It's got all that. Speaker stand? Doesn't need it. Everything is built into one compact enclosure including battery, storage bag, collapsible handle and rolling wheels. The Beacon knocks out the competition.

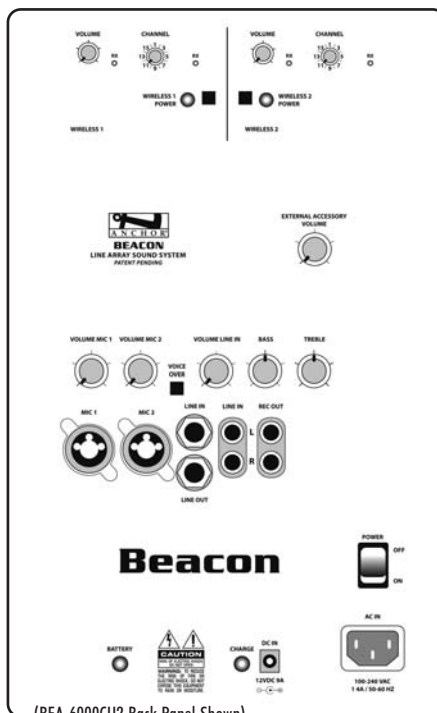

(BEA-6000CU2 Back Panel Shown)

## BEACON MODELS

**BEA-6000** AC/DC powered sound system

**BEA-6000C** External CD player

**BEA-6000U1** 1 built-in wireless receiver

**BEA-6000U2** 2 built-in wireless receivers

**BEA-6000CU1** External CD player & 1  
built-in wireless receiver

**BEA-6000CU2** External CD player & 2  
built-in wireless receivers

## BEACON ACCESSORIES

**MIC-90** Professional dynamic, cardioid  
pattern handheld microphone

**CD-EXT** External CD player

**HC-1660** Custom traveling hard case

### UHF WIRELESS:

**WH-6000** Wireless Handheld micro-  
phone/transmitter

**WB-6000** Wireless body-pack transmitter  
w/ Microphone. Mic options include:  
Over-the-Ear/EM-60T, Lapel/LM-60,  
Collar/CM-60, Headband/HBM-60



## BEACON SOUND SYSTEM TECHNICAL SPECIFICATIONS

Rated Power Output	300 watts AC mode / 60 watts DC mode
Max SPL @ Rated Power	110 db
Battery	12 Volt rechargeable, 9.0 AH
Frequency Response	60 Hz - 15 kHz +/- 3dB
<b>Inputs:</b>	
Lo-Z Microphone	balanced, phantom powered, XLR
Hi-Z Microphone	unbalanced, 1/4" phone
Line	Lo-Z balanced, 1/4" phone/RCA

### Sensitivity For Rated Output:

Lo-Z Microphone	-52 dBV (2.5 mVrms)
Hi-Z Microphone	-43 dBV (7.5 mVrms)
Auxiliary (line)	-14 dBV (200 mVrms)

### Outputs:

Line Output (post fader)	Isolated, 600 ohm, 1/4" phone
AC Power Req.	100 - 240 VAC, 50/60 Hz, 300W max
Dimensions (HWD)	26.25" x 11" x 18" / 66.7 x 28 x 45.7 cm
Weight	45 pounds / 20 Kg

(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



## Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

## 800-262-4671

www.anchoraudio.com